




Suspension

Twin Grip

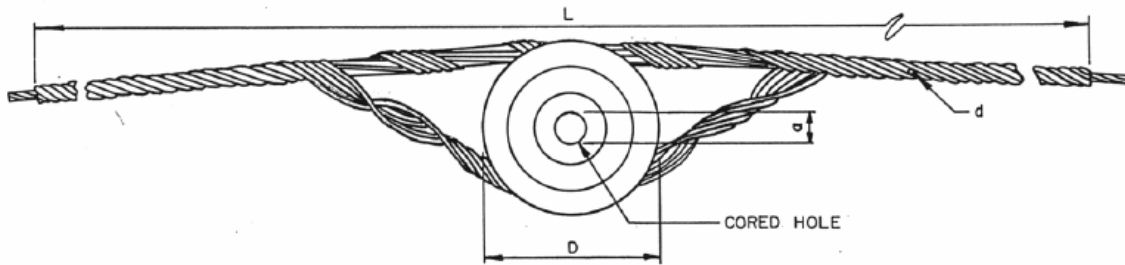

Preformed Line Products Twin Grip suspension units are used to secure galvanized steel strand to the pole. Twin Grip Suspensions can be purchased with either an Aluminum or Galvanized Steel Sheave.

Catalogue Number	Cable Diameter	Aprox. Applied Length (L)	Sheave Dia (D)	Sheave Material	Hole Dia "	Sheave Number	Rod Number
TGS-2500	1/4"	39"	2 7/8"	Alum	13/16"	60213	4602100
TGSMS-3591D	1/4"	39"	2 7/8"	Mal Iron	13/16"	T-60192	4602100
TGSMS-3591	1/4"	39"	2 7/8"	Alum	11/16"	60308	4602100
TGSMS-3591D11	1/4"	39"	2 7/8"	Mal Iron	11/16"	T-60192A	4602100
TGS-2502	5/16"	40"	2 7/8"	Alum	13/16"	60213	4602102
TGSMS-4855D	5/16"	40"	2 7/8"	Mal Iron	13/16"	T-60192	4602102
TGSMS-4855	5/16"	40"	2 7/8"	Alum	11/16"	60308	4602102
TGSMS-4855D11	5/16"	40"	2-7/8"	Mal Iron	11/16"	T-60192A	4602102
TGS-2503	3/8"	52"	3-3/8"	Alum	13/16"	60211	4602103
TGSMS-4856D	3/8"	52"	3 3/8"	Mal Iron	13/16"	T-60108	4602103
TGSMS-4856	3/8"	52"	3 3/8"	Alum	11/16"	60309	4602103
TGSMS-4856D11	3/8"	52"	3-3/8"	Mal Iron	11/16"	60197	4602103
TGS-2504	7/16"	53"	3 3/8"	Alum	13/16"	60211	4602104
TGSMS-4857D	7/16"	53"	3 3/8"	Mal Iron	13/16"	T-60108	4602104
TGSMS-4857	7/16"	53"	3 3/8"	Alum	11/16"	60309	4602104
TGSMS-4857D11	7/16"	53"	3 3/8"	Mal Iron	11/16"	60197	4602104
TGS-2505	1/2"	72"	4 1/2"	Alum	13/16"	60212	4602105